
SUN ODYSSEY

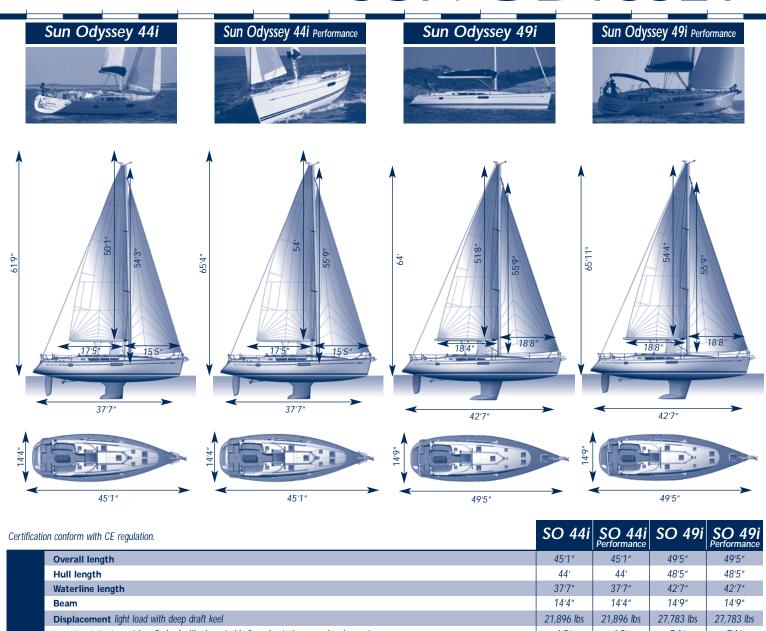

Certification	on conform with CE regulation.	SO 44i	SO 44i Performance	SO 49i	SO 49i Performance
	Overall length	45′1″	45′1″	49′5″	49′5″
	Hull length	44′	44'	48′5″	48′5″
	Waterline length	37′7″	37′7″	42′7″	42′7″
	Beam	14'4"	14'4"	14'9"	14′9″
	Displacement light load with deep draft keel	21,896 lbs	21,896 lbs	27,783 lbs	27,783 lbs
	Standard draft cast iron fin keel with elongated bulb and exterior epoxy barrier coat	6′9″	6′9″	7′1″	7′1″
SLI	Standard keel weight	6,514 lbs	6,514 lbs	8,269 lbs	8,269 lbs
atio	Shoal draft cast iron fin keel with elongated bulb and exterior epoxy barrier coat	5′5″	-	5′7″	-
Specifications	Shoal keel weight	6,968 lbs	-	9,041 lbs	-
eci	Performance keel draft cast iron fin keel with elongated bulb and exterior epoxy barrier coat, profiled leading and trailing edges	-	7′7″	-	7′9″
Sp	Performance keel weight	-	6317 lbs	-	8026 lbs
	CE category (* in process)	A10-B12-C14*	A10-B12-C14*	A10-B12-C14	A10-B12-C14
	Architect / Designer	P. Briand	P. Briand	P. Briand	P. Briand
	Water 2 rotomolded tanks located under forward and aft berths with seperate deck fills	162 Usgal	162 Usgal	162 Usgal	162 Usgal
	Fuel rotomolded tank located under aft berth with deck fill	63 Usgal	63 Usgal	63 Usgal	63 Usgal
	Holding tank rotomolded tank located in head compartment with valve for overboard discharge via gravity and deck fitting for pump out	22 Usgal	22 Usgal	26 Usgal	26 Usgal
	Fridge fibreglass fridge compartment with 2 separate compartments and vertical access	69 Usgal	69 Usgal	67 Usgal	67 Usgal
	Classic mainsail 80% battened, high-tenacity Dacron cloth, Rutgerson® stainless steel eyes and 2 auto reefs	512sqft	-	-	-

Classic mainsail 80% battened, high-tenacity Dacron cloth, Rutgerson® stainless steel eyes and 2 auto reefs	512sqft	-	-	-
Classic mainsail 100% battened, high-tenacity Dacron cloth, Rutgerson® stainless steel eyes and 2 auto reefs	-	-	529sqft	-
Furling genoa 140% high-tenacity Dacron cloth, Sunbrella® UV luff protection, Rutgerson® stainless steel eyes	570sqft	-	668sqft	
Performance mainsail full-batten, Prestige series tri-radial with sandwich construction of double taffeta layers				
and Mylar for form stability and Rutgerson® rolling cars, 2 automatic reefs and a 3 rd classic reef point	-	560sqft	-	592sqft
Performance furling genoa 145% tri-radial Prestige series with sandwich constructions of double taffeta layers				
and Mylar for form stability and Sunbrella® UV luff protection, Rutgerson® stainless steel eyes	-	562sqft		721sqft
Furling mainsail (optional) high-tenacity Dacron cloth, Sunbrella® UV luff protection, Rutgerson® stainless steel eyes	397sqft	-	420sqft	-
Spinnaker optimal size for boat (not available from Jeanneau)	1,291sqft	1,377sqft	1,517sqft	1,743sqft
Total sail area for standard mast and sails	1,082 sqft	1,121sqft	1,198sqft	1,313sqft

Sails

■ Standard □ Option - Not available

		SO 44i	SO 44i Performance	SO 49i	SO 49i
	Lazy bag in Sunrella® Captain Navy fabric with integrated lazy jacks				
	Genoa winches 2 x Harken 50.2 self-tailing winches	•	•	-	-
	Genoa winches 2 x Harken 60.2 self-tailling winches	-	-		
	Coachroof winches 2 x Harken 46.2 self-tailing winches Electric genoa winches 2 x Harken 50.2 STCE-H 12v self-tailing in place of standard winches				
Sail Handling	Electric genoa winches 2 x Harken 60.2 STCE-H 12v self-tailing in place of standard winches	-	-		
	Electric coachroof winch 1 x Harken 46.2 STCE-H 12v self-tailing in place of standard winch to port				
Har	Genoa tracks adjustable Harken lead cars				•
sail	Winch handles 2 x Harken handles with ball-bearing grip Line jammers Spinlock, on both sides of coachroof with Harken return blocks		_		
0,	Mainsheet traveller long, roof-mounted Harken traveller with ball-bearing cars, control lines lead aft to cockpit				
	Padeyes 3 Wichard on each side for spinnaker turning blocks, tweaker lines, pole downhaul	•	•	•	•
	Spinnaker deck hardware triple Spinlock jammer to starboard, and an additional 3-sheave return block on deck				
	Asymmetrical spinnaker gear halyard, 2 sheets, tack line lead forward on deck, reinforced fitting on anchor roller, 3 Harken blocks				
	Symmetrical spinnaker gear halyard, 2 sheets, 2 guys, pole uphaul and downhaul, spinnaker pole and adjustable car for mast, Harken blocks				
	Classic mast aluminium with double spreaders, spinnaker track mounted forward and folding mast steps		-	•	-
	Performance mast aluminium with double spreaders, spinnaker track mounted forward and folding mast steps	-		-	
	Standing rigging discontinuous 1x19 stainless steel wire		-		-
D	Standing rigging discontinuous Dyform® stainless steel wire	-		-	
Rigging	Backstay fixed, double	•	-	_	-
Rig	Backstay adjustable via a block and tackle system and bridle-mounted car Genoa furler with attachment to stemhead fitting and furling line lead aft to roof winch				
Mast and	Genoa furler Factor® racing series with removable drum, double sail slot and aerodynamic profile, mounted to stemhead fittings	•		_	-
ast a	with short link plates to maximise sail area, furling line lead aft to roof winch	-		-	
Ĕ	Running rigging polyester topping lift, mainsail halyard, genoa halyard, mainsheet, genoa sheets				-
	Running rigging Dyneema® mainsail halyard, genoa halyard, mainsheet, genoa sheets	•		-	
	Rigid boom vang with gas cylinder and control line lead aft to the cockpit			_	
	Releasable forestay for storm sail, attaches to padeye in front of the anchor locker, stay is equipped with quick release and adjustment mechanism, inner stay is attached to a padeye on starboard side deck when not in use				
	Teak inlay on seating area, transom and transom steps				
	Teak cockpit floor inlay Teak side decks hand-laid teak side decks				
	Cockpit lockers 2 lockers under bench seats and 2 lazerette lockers under the helm seats for technical access to steering system				
	Cockpit table folding injected fibreglass table with storage, cup holders, bottle holders, stainless steel handrail, courtesy lighting,				
	12v plug, table base provides light, headroom and ventilation to aft cabins	•	•		•
d)	Teak cockpit table with all the same functions of above, standard table but with teak leaves and top, Sumbrella® Captain Taupe cover				
Deck Storage	Gas locker located outboard of port helm, room for 2 gas bottles with connection to gas system and cut-off valve under stove in the galley				
Sto	Large storage locker under cockpit floor (location for optional generator) Wheels 2 leather-covered steering wheels with fibreglass pedestals with handrail, cup holders, compasses and easy access to winches				
Š	Steering wheel covers Sunbrella® Captain Taupe blue with zips for easy removal	_		_	
Ŏ	Transom gate double fibreglass doors that can be secured when open or closed		•		•
Cockpit &	Instrumentation dedicated space for instruments within easy reach of helm positions, room for GPS chartplotter mounted				
ckp	at aft end of cockpit table with easy viewing from each helm				
ပိ	Engine controls throttle and engine control panel mounted at starboard helm, engine panel, RPM gauge, warning lights, ignition	-	-	_	-
	Swim ladder stainless steel folding ladder mounted on swim platform Cockpit shower retractable hot and cold water shower with tap				
	Cockpit cushions Sunbrella® Captain Taupe cushions for seating area with attachment clips			_	
	Cockpit bimini Sunbrella® Captain Taupe with stainless steel bows, retractable with storage cover				
	Cockpit sprayhood wide Sunbrella® Captain Taupe with vinyl windscreen with zip-out middle window for ventilation, retractable				
	Anchor locker forward, lockable, room for anchor and tackle, integrated windlass area, holder for windlass handle	•	•	•	•
	Deep sail locker forward, accessible via opening deck hatch with lock, stainless steel ladder, lighting	•	-	•	
	Short Performance bow pulpit stainless steel	•	•	•	•
	Stern pulpits stainless steel with flag holder, buoy bracket				
	Outboard engine bracket mounted on stern pulpit				
e e	Windlass Quick 1000W combination rope and chain 10mm, vertical-mounted in the anchor locker, hand-held remote, manual handle	•		-	-
war	Windlass LEWMAR 1500W combination rope and chain 12mm, vertical-mounted in the anchor locker with above-deck line drum, hand-held remote, manual handle		-		
Deck Hardware	Windlass control second windlass control mounted in cockpit with chain counter for easy, short-handed anchoring Anchor roller double stainless steel fitting with self-launching roller for hands-free launching and retrieving				
	Anchoring kit Delta anchor 20kg with 32 meters of 10mm chain and 45 meters of 18mm line			-	-
Dec	Anchoring kit Delta anchor 25kg with 40 meters of 12mm chain and 50 meters of 22mm line	-	-		
	Lifelines double level of stainless steel lifelines with PVC coating, stainless steel stanchions with open gates				
	Toerail teak profile with integrated stainless steel chocks and drainage for side deck	-			
	Cleats 6 x aluminium mooring cleats Rubrail for hull protection				
	TABLET OF HAIL PROTOCOLOT		Ш	Ш	

			SO 44i	SO 44i	SO 49i	SO 49i Performance
*	vare	Mooring kit 6 fenders and 4 docklines				
Deck	Hardware	Handrails sculpted, long teak handrails on coachroof for secure movement forward	•	•	•	•
	: [Drive Draw State of the ICO of the transfer of the Ico		_	_	_
	tion	Deck Prisma Process® injected deck, ISO gelcoat surface, discontinuous balsa block coring Hull solid, hand-laid fibreglass, ISO glecoat surface, protective barrier coat		•	-	
	Construction				_	_
inhting:	Con	Structure 3rd generation counter-moulding, high-load zones cut out and relaminated, drainage system through structure, special emergency repair zone in keel area		•		•
		LED navigation lights and anchor light		•		
	ting	Flush mounted chromed brass LED ceiling lights in saloon, head compartments and cabins				•
	Ligh	On/off switches in saloon for overhead lights				
		Indirect LED lighting under side decks in saloon	•	•	•	•
		Red/white combination light for night vision at nav station	•	•	•	
		12v alternator output	80 A	80 A	80 A	80 A
		Charge distributor/isolator				•
		Engine start battery capacity	110 Ah	110 Ah	110 Ah	110 Ah
		Domestic battery bank capacity	330 Ah	330 Ah	330 Ah	330 Ah
	rcuit	Extra 110 Ah domestic battery	•	•		•
S	Electrical Circuit	Positive battery switch for engine bank, positive battery switch for domestic bank and negative general cut-off switch				
<u>io</u>	ctric	110 v shore power inlet with differential breaker	•	•	•	•
pt	ä	60 A Cristec battery charger, multi-phase				
Technica! features and options		Electrical panel with 12 v breakers, 110 v breakers, LCD display with 12 v voltmeter, 12 v consumption meter, fuel and water tank gauges	•	•	-	-
sar		Electrical panel with 12 v breakers, 110 v breakers, LCD display with 12 v voltmeter, 12 v consumption meter, fuel and water tank gauges, backlight	-	-		
ure		One 110 v and 12 v plug per cabin, 110 v plugs in galley, saloon and nav station	•	•		•
atı		Generator 5,5 kw ONAN 110 v located in fully-soundproofed, locker below cockpit floor, power selector switch and generator	_	_	_	_
ai fe		control panel located at nav station, exhaust separator with below waterline discharge for silent operation				
)ic		Hot and cold pressurised water distributed through-out the boat via semi-rigid hose		_	_	•
çh		"Heavy-duty" water pump and accumulator tank for consistent water pressure	-	_	_	
Te	bing	11 Usgal hot water tank that is connected to engine heat exchanger and to 110 v electrical system	•		_	•
	E I	Chromed shower faucets in washrooms	-	_	_	
		Shower sumps equipped with individual electric pumps and on-off switches	-	•	•	
		Large manual pump marine toilets Jabsco electric Quiet-Flush toilets in place of standard, available for each head compartment				
		Yanmar 4JH5-CE 54 HP , 39.6Kw sail drive latest generation of environmentally friendly engines		<u> </u>	-	-
		Yanmar 4JH4-TE 75 HP , 55Kw, sail drive turbocharged, latest generation of environmentally friendly engines	-	-		
		360 docking System-Yanmar 4JH4-TE 75HP engine with pivoting sail drive on it and joystick (includes bow thruster and autopilot)			_	_
		Fully soundproofed engine compartment with engine access behind stairwell and from aft cabin				
		Stainless steel propeller shaft 35mm diameter				
	gine	Fuel/water separator	•	-	_	•
	Engin	Built-in muffler, forced air ventilation and stainless steel exhaust fitting aft				
		Fixed 3-blade bronze propeller	•	-	•	-
		Max-Prop 3-blade feathering propeller adds performance under power, low-speed manoeuvring, backing and less drag under sail				
		Bow thruster Map-Power composite mounted in tunnel with additional battery and control at starboard helm				
		Line cutting collar on shaft for extra protection against fouling				
	, [Fixed hull ports with track-mounted curtains	4	4	4	4
Š		Opening cockpit and roof ports with curtains	6	6	6	6
į	5	Opening deck hatches forward-facing with sun blinds integrated into headliner	9	9	10	10
Comfort features and options	2	Insect screens for each deck hatch, integrated into headliner				
	2	CD/radio/MP3 player in saloon	•	•	•	•
	5	BOSE® 2.1 speaker system ACCOUSTIMASS 3, speakers with base unit in saloon				
	dal	Cockpit speakers watertight	•	•	•	•
÷		DVD player in saloon (replaces standard CD player)				
Comfor	2	Air Conditioning 110 v 24000 BTU 2 units with digital controls and vents in saloon, forward and aft cabins				
	3	Forced air heating 1 unit 5500 BTU Webasto® diesel heater installed in cockpit lazerette, vents in aft cabin, saloon and head compartments			-	-
	Forced air heating 1 unit 5500 BTU and 1 unit 3900 Webasto® diesel heaters installed in cockpit lockers, vents in aft cabin, saloon and heads	-	-			

■ Standard □ Option - Not available C = Cabins H = Head

		SO 44i		SO 49i		
		3C/2H	3C/3H	4C/2H	3C/2H	4C/4H
	Fine Teak® interior laminated panels with solid wood trim around galley, companionway and cabinetry, finished in satin UV stabilised varnish					
Wood	Laminate florboards with light-coloured lines, varnished edges		•		•	
\$	PREMIUM matresses available on all berths, provides the ultimate in comfort					
	Forward owner's cabin with central berth and reading lights at head of berth				•	
	Double berth with trim, PREMIUM mattress	6'7" X 4'11"	6'7" X 4'11"	-	6′7″ X 5′3″	_
	Mattress battens under high-density foam mattress for increased comfort			-		
	Cushioned seat			-		_
	Storage under berth			-		
	Large hanging locker			-		
	Vanity in forward cabin with desk, mirror, and lighting					- - -
_	Wood and white upholstered panels along hull					
cabin		_			_	-
	Storage lockers along hull sides with gas lifters and indirect lighting underneath		-	-	•	-
owner's	Private forward owner's head compartment with sink, separate shower with plexiglass door, mirror, towel holder, toilet paper holder, wastebasket, cabinet above sink and shower sump with grate and electric drainage pump					
ard (Twin forward cabins transformable into single cabin by removable longitudinal bulkhead	_			_	-
orw	Double berths, PREMIUM mattresses	-	-	6'8"x4'5" - 6'9"x4'9"	-	
-	Storage under berth			00 ATO 07 AT7		00 410 07 417
	Hanging lockers			_		-
	Storage lockers along hull sides with gas lifters and indirect lighting underneath					68'45' - 69'49'
		-	-	_	-	•
	Bunk beds in forward cabin, removable	-	-		-	-
	Fabric hull liner	-	-	_	-	•
	2 head compartments forward with sink, shower, mirror, towel holder, toilet paper holder, wastebasket, cabinet above					
2	sink and shower sump with grate and electric drainage pump	-	-	-	-	
ţio	Twin aft cabins	•	•			•
Interior features and options Twin aft cabins	Double berths, PREMIUM mattresses	67"x6'8" - 4'11"	6'7"x6'8" - 4'11"	6'7"x6'8" - 4'11"	67"x6'8" - 4'11"	67%8"- 411"
nd S	Deep cabinet with shelves and hanging rod per cabin	•	•	•	•	•
es an cabins	Storage compartments along hull with indirect lighting underneath and open hanging lockers to either side of berth					•
e atur e win aft (Wood and white upholstered panels along hull	•	•	•	•	_
eat Win	Head compartment aft with sink, shower, mirror, towel holder, toilet paper holder, wastebasket, shower sump,					
T.	with grate and electric drainage pump, access from aft cabin and saloon		-	-		-
eric	2 head compartments aft with sink, shower, mirror, towel holder, toilet paper holder, wastebasket, cabinet above sink					
<u>lut</u>	and shower sump with grate and electric drainage pump access from aft cabins and saloon	-	•	•	-	-
E	Navigation station full-function with general electrical panel					
station	Lateral navigation desk with cushioned stool	-	•		-	<u> </u>
- E	Navigation desk with roll-away top and pass-through for plugs to facilitate the use of a laptop computer		-	-		•
Navigati	Leather-wrapped stainless steel handrail and leather-lined pen holder	-	-	-	•	_ :
Ž	Large storage drawer with divider under nav station/bar cabinet		-	-		-
	Saloon with U-shaped seating area to starboard, wrap-around cushions and storage under seating area					
	Saloon dining table with fiddles, removable pedestal legs and built-in bottle locker					
	Split cushion to fit over saloon table and support to turn standard table into a double berth					
	Deluxe saloon table with fixed storage base, inlayed table top, and folding leaves					
Saloon	Fixed bench seat facing table with cushion and leather-wrapped handrail					
Sal	2 removable luxury armchairs with tiedowns for saloon (instead of bench seat)					
	Upper storage cabinets					•
	Storage cabinet along hull					
	Indirect lighting under sidedecks	•	•			•
	Companionway made of laminate and solid wood trim with curved, hingred for access to engine, leather-wrapped handrails to either side	•				•
	Galley with double sinks with covers and reversible cutting board, solid surface countertops, chrome plumbing fittings, storage cabinets and drawers					•
	Longitudinal galley					
ý	Dish draining compartment with cover	•	•		•	•
Galley	3-burner stainless steel stove with thermostatically controlled oven and stainless steel protection bar, in place of regular stove/oven unit					
	Double fridge box, top-loading with 2 opening lids, storage bins, 12v refrigeration and gas lift for door in large box and compressor					
	12v freezer unit for smaller fridge box with separate compressor					
	Stainless steel vertical access door to large fridge box, includes wire shelving inside fridge box for increased storage					
٤	Forward cabin (s)		6′3″		6'	
00	Aft cabin (s)		6′5″		6'	
Headroom	Companionway		6′5″		6'	
Ĭ E	Saloon		6'4"		6'	5"
	Galley		6'3"		6'	3"

■ Standard □ Option - Not available C = Cabins H = Head



